



REGENT



BUILT TO
HANDLE IT ALL

VERSATILE & DEPENDABLE

Shepherd Regent casters are USA-made with high-strength steel rigs for increased strength and durability. Multiple fastenings, wheel types, and finishes exist for the Regent series, providing great flexibility of style and usage.

3D CAD MODELS
AVAILABLE ONLINE

Visit Website for details



Your equipment deserves the best



Made in the U.S.A.*

RoHS
Environmentally friendly
Consult factory for RoHS requirements on a part specific basis.

NSF
COMPLIANT
Consult the NSF listing page on a part specific basis for NSF requirements.

Features

- Industry leading selection and overall value
- Fast deliveries for any order quantity
- High-strength & heat treated steel for increased durability and caster life
- Dual ball raceways
- RoHS compliant zinc plating for corrosion resistance
- Octagon washer on stem models for easy installation
- NSF approved (less thread guards)

Applications

- Store fixtures
- Carts
- Institutional Equipment
- Food Service Equipment
- Furniture
- Janitorial Equipment
- Office Equipment
- Racks and Storage Equipment
- Medical Equipment

Options

- **Brakes:** available on all sizes (see below and product pages for details).
- **Finishes:** Zinc plating standard; optional finishes available (see below).
- **Fastenings & Wheels:** additional fastening sizes and wheel options available. Consult factory.
- **1-5/8" Diameter Models:** see Mighty-Mite on page 34.



Wheel Selection



| | Polyolefin | Hard or Soft Rubber | Thermoplastic Rubber (TPR) | Polyurethane (TPU) | 3" No-Matic | Vipor | MonoTech | 5" Precision Bearing MonoTech |
|---------------------|------------|---------------------|----------------------------|--------------------|-------------|-------|----------|-------------------------------|
| Floor Protection* | ✓ | ✓ | ✓+ | ✓+ | ✓+ | ✓+ | ✓+ | ✓+ |
| Non-Marking | ✓ | ✓ | ✓+ | ✓+ | ✓+ | ✓+ | ✓+ | ✓+ |
| Durability | ✓+ | ✓ | ✓ | ✓+ | ✓ | ✓+ | ✓+ | ✓+ |
| Cushioned Ride | | ✓+(soft) | ✓ | ✓ | ✓+ | ✓ | ✓+ | ✓+ |
| Chemical Resistance | ✓+ | ✓ | ✓ | ✓+ | ✓ | ✓+ | ✓+ | ✓+ |

*See pages 40 for application details.

Brake Selection



Side Brakes for 2", 2-1/2" and 3" models. Add **[B]** at end of model.



Top Lock Brakes 3" and 4" diameter models. Add **[TL]** at end of model. Not compatible with top plate models.




Tread Lock Brakes 4" and 5" models. Add **[B]** at end of model.



Side Brakes 4" and 5" models. Add **[SB]** at end of model.

Finish Options

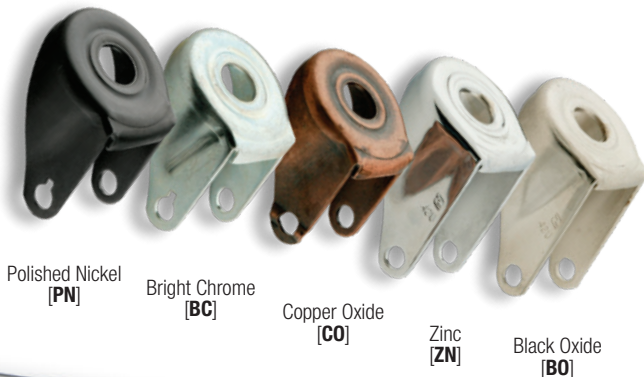

Socket Options

Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages 48-49 for more information.



Connects casters to wood



Connects casters to round tubes



Connects casters to square tubes



Weldable caster mount



Metal T nut




Connect casters to PVC pipe legs



Connect casters to threaded pipes



Corner brackets

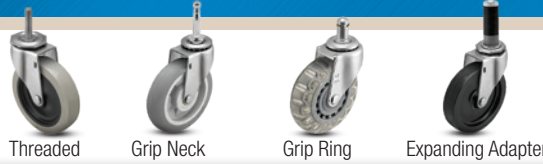


Stem Models

| Wheel Diameter (Inches) | Tread Width (Inches) | Mounting Height (Inches) | Swivel Radius (Inches) | Tread Type | Dynamic Load (Pounds) | Base Model Number (Add fastening code) | Fastening Selection* |
|-------------------------|----------------------|--------------------------|--|----------------------------|-----------------------|--|---|
| 2" | 13/16" | 2-5/8" | 1-15/16" Side Brake: 2-1/8" | Soft Rubber | 80 | PRE20___ZN-3R | Threaded: 532, 507, 500, 637, 605, 634 Grip Neck: 302 Grip Ring: 223, 211, 222, 273 |
| | | | | Thermoplastic Rubber | 80 | PRE20___ZN-TPR | |
| | | | | Hard Rubber | 90 | PRE20___ZN-3H | |
| | | | | Polyurethane | 90 | PRE20___ZN-TPU | |
| | | | | Solid Wall Polyolefin | 90 | PRE20___ZN-3ES | |
| | | | | Polyolefin | 90 | PRE20___ZN-3E | |
| 2-1/2" | 13/16" | 3-1/8" | Swivel & Side Brake: 2-1/8" | Soft Rubber | 80 | PRE25___ZN-3R | Threaded: 532, 507, 500, 637, 634, 605 Grip Neck: 302 Grip Ring: 223, 211, 222, 273 |
| | | | | Thermoplastic Rubber | 80 | PRE25___ZN-TPR | |
| | | | | Hard Rubber | 95 | PRE25___ZN-3H | |
| | | | | Polyurethane | 95 | PRE25___ZN-TPU | |
| | | | | Polyolefin | 95 | PRE25___ZN-3E | |
| | | | | 3" | 13/16" | 3-1/2" | |
| Thermoplastic Rubber | 110 | PRE30___ZN-TPR | | | | | |
| No-Matic | 110 | PRE30___ZN-NOM | | | | | |
| Hard Rubber | 120 | PRE30___ZN-3H | | | | | |
| Polyurethane | 120 | PRE30___ZN-TPU | | | | | |
| Polyolefin | 120 | PRE30___ZN-3E | | | | | |
| MonoTech | 120 | PRE30___ZN-MNT | | | | | |
| Vipor | 120 | PRE30___ZN-VPR01(CG) | | | | | |
| 4" | 15/16" | 4-3/4" | 3-7/16" Side Brake: 3-1/2" Top Lock Brake: 4-1/16" | Soft Rubber | 125 | PRE40___ZN-3R | Threaded: 605, 741, 748, 705, 800, 806 Grip Ring: 211, 273, 204 Expanding Adapter: 440-455 |
| | | | | Thermoplastic Rubber | 125 | PRE40___ZN-TPR | |
| | | | | Hard Rubber | 150 | PRE40___ZN-3H | |
| | | | | Polyurethane | 150 | PRE40___ZN-TPU | |
| | | | | Polyolefin | 150 | PRE40___ZN-3E | |
| | | | | MonoTech | 150 | PRE40___ZN-MNT | |
| | | | | Vipor | 120 | PRE40___ZN-VPR01(CG) | |
| 5" | 15/16" | 5-3/4" | Swivel & Brake: 4-1/8" | Soft Rubber | 130 | PRE50___ZN-3R | Threaded: 605, 741, 748, 705, 800, 806 Grip Ring: 211, 273, 204 Expanding Adapter: 440-455 |
| | | | | Thermoplastic Rubber | 130 | PRE50___ZN-TPR | |
| | | | | Hard Rubber | 150 | PRE50___ZN-3H | |
| | | | | Polyurethane | 150 | PRE50___ZN-TPU | |
| | | | | Polyolefin | 150 | PRE50___ZN-3E | |
| | | | | MonoTech | 160 | PRE50___ZN-MNT | |
| | | | | MonoTech Precision Bearing | 160 | PRE50___ZN-MNT33(GG) | |


Plate Models on Next Page

*To order, include blue fastener code in Base Model Number. Example: PRE40**605**ZN-3R ▲


Threaded Stem

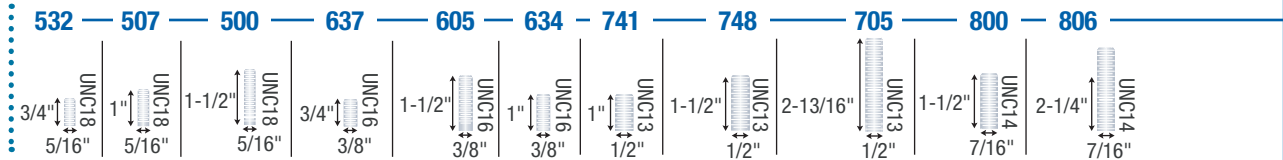

Grip Neck Grip Ring Stem

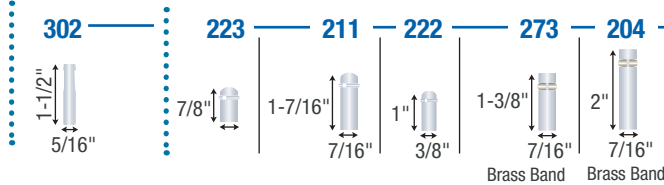

Expanding Adapter Stem

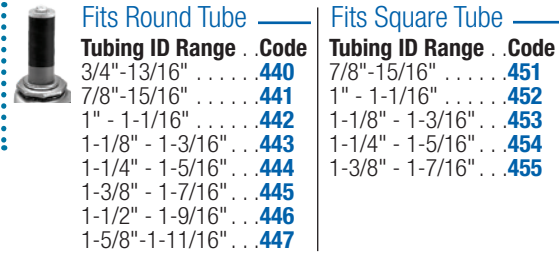

Side Brakes for 2", 2-1/2" and 3" models. Add **[B]** at end of model.



Top Lock Brakes 3" and 4" diameter models. Add **[TL]** at end of model.



Tread Lock Brakes 4" and 5" models. Add **[B]** at end of model.



Side Brakes 4" and 5" models. Add **[SB]** at end of model.



Swivel Top Plate


Rigid Top Plate

Top Plate Models

| Wheel Diameter (Inches) | Tread Width (Inches) | Mounting Height (Inches) | Swivel Radius (Inches) | Tread Type | Dynamic Load (Pounds) | Swivel Base Model Number (Add fastener code) | Rigid Base Model Number | Fastening Selection* |
|-------------------------|----------------------|--------------------------|---|----------------------------|-----------------------|--|-------------------------|---|
| 2" | 13/16" | 2-5/8" | 1-15/16" Side Brake: 2-1/8" | Soft Rubber | 80 | PRE20___ZN-3R | | Swivel: 113, 108 |
| | | | | Thermoplastic Rubber | 80 | PRE20___ZN-TPR | | |
| | | | | Hard Rubber | 90 | PRE20___ZN-3H | | |
| | | | | Polyurethane | 90 | PRE20___ZN-TPU | | |
| | | | | Solid Wall Polyolefin | 90 | PRE20___ZN-3ES | | |
| | | | | Polyolefin | 90 | PRE20___ZN-3E | | |
| | | | | Vipor | 90 | PRE20___ZN-VPR01(CG) | | |
| 2-1/2" | 13/16" | 3-1/8" | Swivel & Side Brake: 2-1/8" | Soft Rubber | 80 | PRE25___ZN-3R | | Swivel: 113, 108 |
| | | | | Thermoplastic Rubber | 80 | PRE25___ZN-TPR | | |
| | | | | Hard Rubber | 95 | PRE25___ZN-3H | | |
| | | | | Polyurethane | 95 | PRE25___ZN-TPU | | |
| | | | | Polyolefin | 95 | PRE25___ZN-3E | | |
| 3" | 13/16" | 3-1/2" | Swivel and Side Brake: 2-1/2" Top Lock Brake: 3-5/16" | Soft Rubber | 110 | PRE30___ZN-3R | PRI30120ZN-3R | Swivel: 113, 108, 120 Rigid: 120 |
| | | | | Thermoplastic Rubber | 110 | PRE30___ZN-TPR | PRI30120ZN-TPR | |
| | | | | No-Matic | 110 | PRE30___ZN-NOM | PRI30120ZN-NOM | |
| | | | | Hard Rubber | 120 | PRE30___ZN-3H | PRI30120ZN-3H | |
| | | | | Polyurethane | 120 | PRE30___ZN-TPU | PRI30120ZN-TPU | |
| | | | | Polyolefin | 120 | PRE30___ZN-3E | PRI30120ZN-3E | |
| | | | | MonoTech | 120 | PRE30___ZN-MNT | PRI30120ZN-MNT | |
| | | | | Vipor | 120 | PRE30___ZN-VPR01(CG) | PRI30120ZN-VPR01(CG) | |
| 4" | 15/16" | 4-7/8" | 3-7/16" Side Brake : 3-1/2" Top Lock Brake: 4-1/16" | Soft Rubber | 125 | PRE40___ZN-3R | PRI40120ZN-3R | Swivel: 120 Rigid: 120 |
| | | | | Thermoplastic Rubber | 125 | PRE40___ZN-TPR | PRI40120ZN-TPR | |
| | | | | Hard Rubber | 150 | PRE40___ZN-3H | PRI40120ZN-3H | |
| | | | | Polyurethane | 150 | PRE40___ZN-TPU | PRI40120ZN-TPU | |
| | | | | Polyolefin | 150 | PRE40___ZN-3E | PRI40120ZN-3E | |
| | | | | MonoTech | 150 | PRE40___ZN-MNT | PRI40120ZN-MNT | |
| | | | | Vipor | 120 | PRE40___ZN-VPR01(CG) | PRI40120ZN-VPR01(CG) | |
| 5" | 15/16" | 5-7/8" | Swivel & Side Brake: 4-1/8" | Soft Rubber | 130 | PRE50___ZN-3R | PRI50120ZN-3R | Swivel: 120 Rigid: 120 |
| | | | | Thermoplastic Rubber | 130 | PRE50___ZN-TPR | PRI50120ZN-TPR | |
| | | | | Hard Rubber | 150 | PRE50___ZN-3H | PRI50120ZN-3H | |
| | | | | Polyurethane | 150 | PRE50___ZN-TPU | PRI50120ZN-TPU | |
| | | | | Polyolefin | 150 | PRE50___ZN-3E | PRI50120ZN-3E | |
| | | | | MonoTech | 160 | PRE50___ZN-MNT | PRI50120ZN-MNT | |
| | | | | MonoTech Precision Bearing | 160 | PRE50___ZN-MNT33(GG) | PRI50120ZN-MNT33(GG) | |


*To order, include blue fastener code in Base Model Number. Example: PRE30**113**ZN-3R

Swivel Top Plate

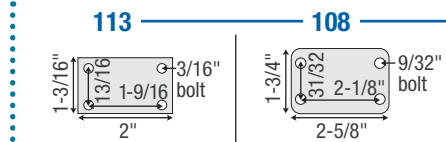

Note: 113 plate is not NSF listed for food service industry.

Rigid Top Plate



Side Brakes for 2", 2-1/2" and 3" models. Add **[B]** at end of model.

Tread Lock Brakes 4" and 5" models. Add **[B]** at end of model.

Side Brakes 4" and 5" models. Add **[SB]** at end of model.

